



CloudGate Zhaga 150

NB-IoT | NANO SIM CARDHOLDER

REMOTICOM | CloudGate Zhaga 150 | ZHAGA SMART CONTROLLER | NB-IoT | D4i | DALI 2.0 | MQTT | NANO SIM CARDHOLDER

CloudGate Zhaga 150.

The Remoticom CloudGate Zhaga 150 series are the most advanced products in our Zhaga Smart Controller family. The controller comes standard with GPS, LUX sensor and uses Dali 2.0 specification. The CloudGate Zhaga 150 is equipped with a nano SIM card holder, allowing the end user to choose the NB-IoT provider. Based on the MQTT network protocol, the current status can be monitored in real time and a day/weekly schedule can be easily applied.

Also, after an error detection, a notification will be sent automatically. The CloudGate Zhaga 150 is controlled by user-selectable portal/data management system and via the Remoticom API. The API connection can also be used for data exchange with other existing data or management systems. Because the firmware includes a holiday and exception calendar, different dimming profiles and working times can be set compared to the usual daily and weekly regimes.

The emergency function can also be set, whereby the fire level is immediately set to 100%. The built-in tilt detection can be used to monitor the tilt of the column. In case of a tilt of more than 5 degrees, an error message will be given. The CloudGate Zhaga 150 creates its own tilt zero point after 48 hours of operation.


*By using an API, Remoticom creates a universally applicable connected solution.

ADVANTAGES.

- ✓ Sustainable, energy- and cost-saving solution
- ✓ Provider self-selection by means of supplied nano SIM card
- ✓ Plug and Play system
- ✓ D4i protocol for driver data readout
- ✓ Public holidays and exception calendar
- ✓ OTA (Over the Air programmable)
- ✓ Compact dimensions
- ✓ Works with a Sensor Ready Driver
- ✓ NB-IoT communication, MQTT protocol
- ✓ GPS
- ✓ Emergency function possible via API (fire mode 100%)
- ✓ Tilt detection

INSTALLATION CloudGate Zhaga 150.

When mounting, press lightly and then turn 45° clockwise.

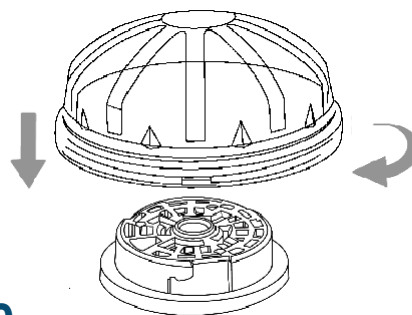

PRODUCT DATA CloudGate Zhaga 150.

Physical information

Dimensions	Diameter 80 mm, height 40 mm
Weight	70 grams
Colour	Transparant
Connectors	Zhaga Book 18

Electrical information

Input voltage	24V interface of the SR driver
Light sensor	Yes
Number of controllable drivers per CloudGate Zhaga 150	2
Standby average current	8 mA
Standby average power	0,35 W
Peak current	26 mA
Peak power	0,65 W

Environment & Quality

Operating temperature	-30 °C until 50 °C
Air humidity	10% until 90% non-condensing
Storage temperature	-30 °C until 50 °C
Storage humidity	5% to 90% non-condensing
IP Class	IP66
IK Class	IK08
UV protection	Protection by casing
Quality marks	CE
Digital connection	Sensor Ready Drivers D4i

Commercial

Article number	786.11.015.01
EAN number	8720892233387